



Chemie

CELLQ® 6030

CELLQ 6030 is a modified, multi-purpose, high quality cellulose ether (HydroxyPropyl MethylCellulose) invented for high class tile adhesive (CTA) especially high quality with best performance as C2 class with reduced sagging. It can be also useful in exterior thermal insulation systems (ETICS) or high quality Machine or Hand Plasters. CELLQ 6030 provides excellent performance as sag resistance, long open time and nice, smoothly workability.


Due to the special modification cellulose ether CELLQ 6030 gives the tile adhesive quite fast consistency development, a long open time with slightly delay of the cement hydration.

Even at higher temperature CELLQ 6030 shows good water retention and finally cohesion of the mortar shows high value.

MAIN APPLICATIONS

- High performance Tile Adhesive
- ETICS
- Cement Plasters

CELLQ PERFORMANCE

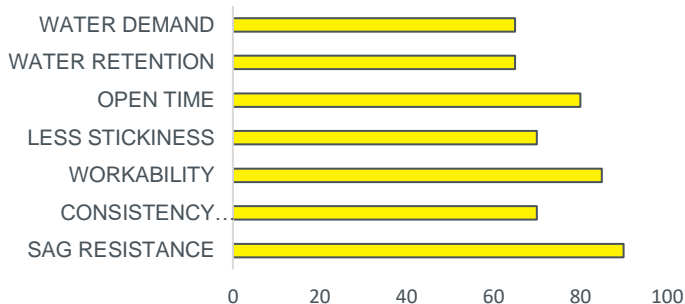

Chemical base:
Viscosity:
Particle size:
Moisture content:

Cellulose ether derivate (HPMC)
Approximately 10.000-20.000 mps
Fine powder
Max 8%

Storage:

Stored in closed bags at room temperature, CELLQ 6030 can be kept for a long time. As with all cellulose derivatives it absorbs water from moist air. Keep away from heat.

Safety:

According to EU legislation, CELLQ 6030 is not hazardous. All further detailed information is available on the Safety Data Sheet.