




GLOBALTINT SW



- water pigment paste “voc free”, based in inorganic and organic pigments;
- selection of pigments for tinting systems, with high weathering fastness, compatible with acrylic, vinyl veova, siloxan, silicate, acrylic stirene paints, etc.
- color formulation software/ personal colorcards;
- are suitable to be used “IN PLANT” or “POS” by weight or volume

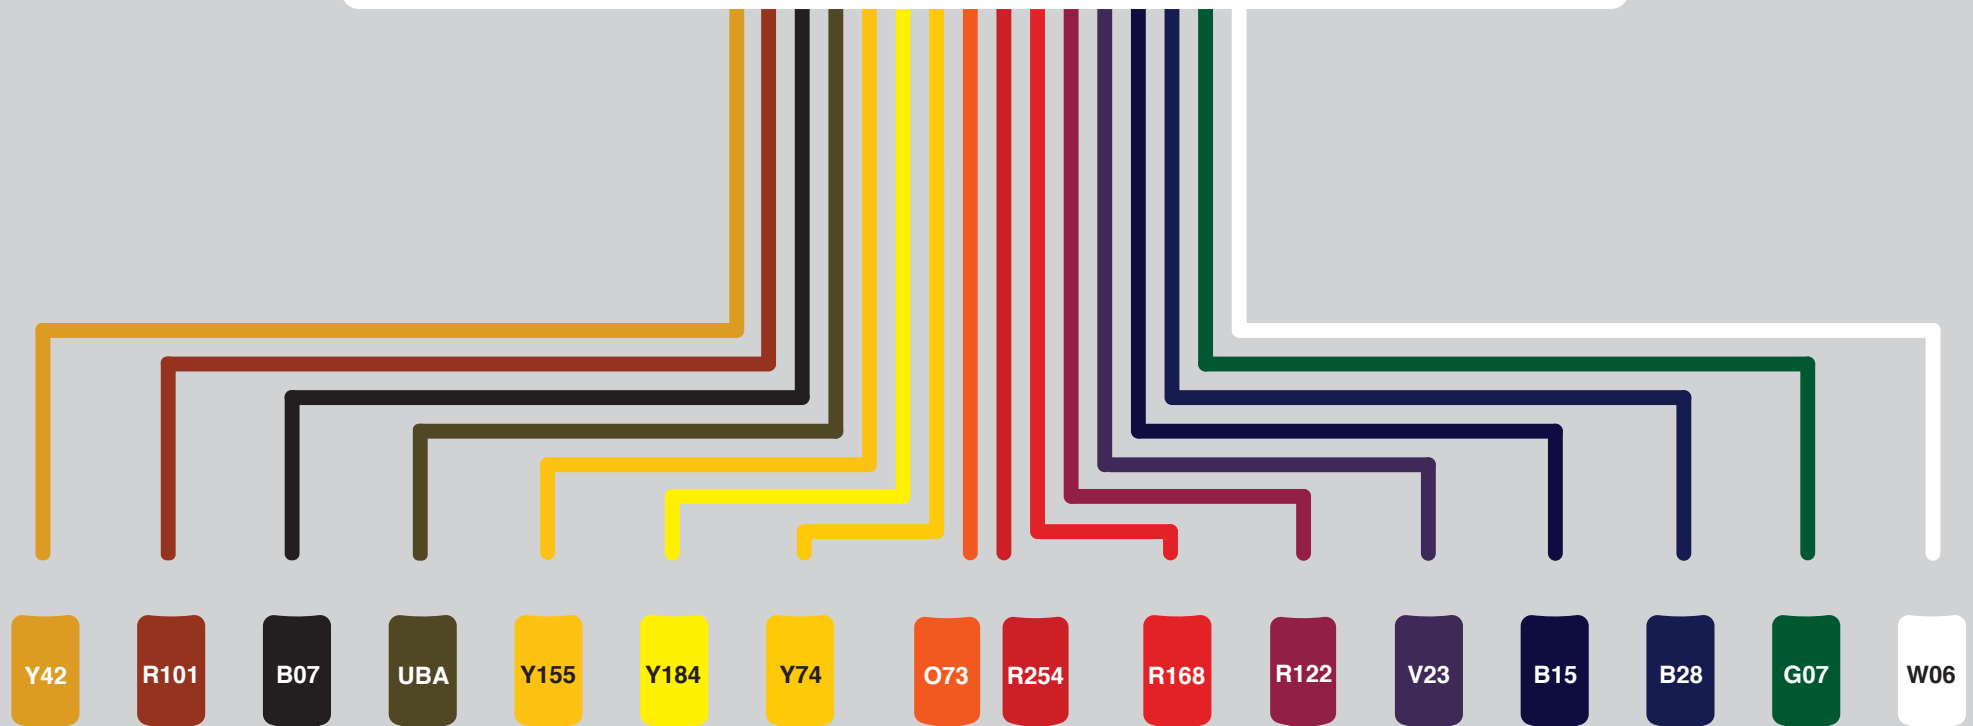

GLOBALTINT SW

GLOBALTINT references	Application	C.I.	Dens.	Pig. Conc %	Weathering Fastness			Light Fastness			Alcali (2% NaOH)
					Tom cheio	1/3 TiO ₂	1/25 TiO ₂	Tom cheio	1/3 TiO ₂	1/25 TiO ₂	
SW Y42	Int Ext	PY42	1,67	50%	5	5	5	8	8	8	5
SW R101	Int Ext	PR101	1,95	56%	5	5	5	8	8	8	5
SW B07	Int Ext	PB7	1,18	25%	5	5	5	8	8	8	5
SW UMBAR	Int Ext	Mix	1,48	43%	5	5	5	8	8	8	5
SW Y155	Ext	PY155	1,14	35%	4-5	4	4	7-8	7-8	7-8	5
SW Y184	Ext	PY184	1,72	49%	5	5	5	8	8	8	5
SW Y74	Int Ext	PY74	1,13	31%	4	2-3	2-3	7	6	6	5
SW O73	Int Ext	PO73	1,15	38%	4-5	4	4	8	7-8	7	5
SW R254	Int Ext	PR254	1,21	35%	4-5	4	4	8	7-8	7	5
SW R168	Ext	PR168	1,22	28%	5	5	5	8	8	8	5
SW R122	Int Ext	PR122	1,14	26,5%	5	4-5	4	8	7-8	7	5
SW V23	Int Ext	PV23	1,14	28%	4-5	4	4	8	7-8	7	5
SW B15	Int Ext	PB15:3	1,23	42%	5	4-5	4-5	8	8	8	5
SW B28	Ext	PB28	1,74	60%	5	5	5	8	8	8	5
SW G07	Int Ext	PG7	1,31	40%	5	4-5	4-5	8	8	8	5
SW W06	Int Ext	PW6	1,83	62%	5	5	5	8	8	8	5