




GLOBALTINT SU



- water pigment universal paste “voc free”, based in inorganic and organic pigments;
- selection of pigments for tinting systems, with high weathering fastness, compatible with:
 - water base paint - acrylic, vinyl veova, siloxan, silicate, acrylic stirene paints;
 - solvent base paint - alkyd systems;
- color formulation software/ personal colorcards;
- are suitable to be used “IN PLANT” or “POS” by weight or volume.

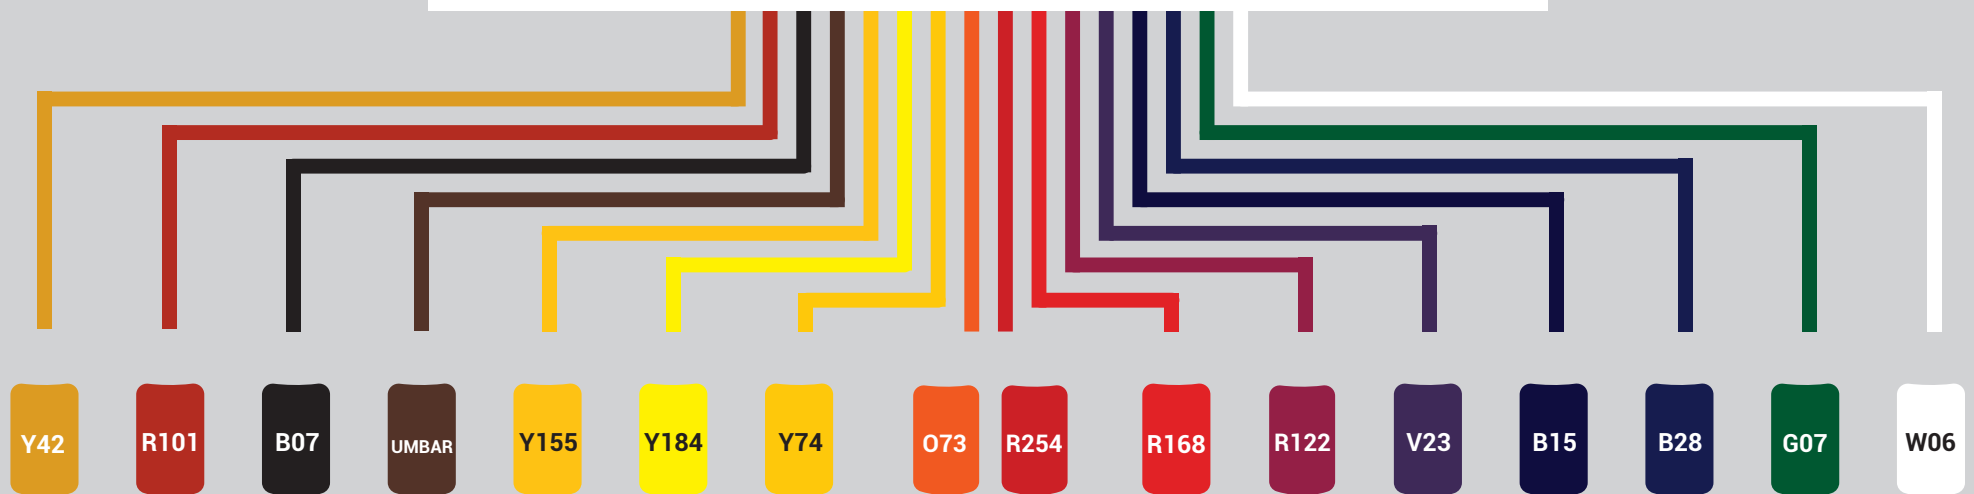

Y42 R101 B07 UMBAR Y155 Y184 Y74 O73 R254 R168 R122 V23 B15 B28 G07 W06



GLOBALTINT SU

GLOBALTINT ref	Aplication	C.I.	Dens.	Fig. Conc. %	Weathering Fastness			Light Fastness			Alcali (2% NaOH)
					Full shade	1/3 TiO ₂	1/25 TiO ₂	Full shade	1/3 TiO ₂	1/25 TiO ₂	
SU Y42	Int Ext	PY42	1,67	50%	5	5	5	8	8	8	5
SU R101	Int Ext	PR101	1,95	56%	5	5	5	8	8	8	5
SU B07	Int Ext	PB7	1,18	25%	5	5	5	8	8	8	5
SU UMBAR	Int Ext	Mix	1,48	43%	5	5	5	8	8	8	5
SU Y155	Ext	PY155	1,14	35%	4-5	4	4	7-8	7-8	7-8	5
SU Y184	Ext	PY184	1,72	49%	5	5	5	8	8	8	5
SU Y74	Int Ext	PY74	1,13	31%	4	2-3	2-3	7	6	6	5
SU O73	Int Ext	PO73	1,15	38%	4-5	4	4	8	7-8	7	5
SU R254	Int Ext	PR254	1,21	35%	4-5	4	4	8	7-8	7	5
SU R168	Ext	PR168	1,22	28%	5	5	5	8	8	8	5
SU R122	Int Ext	PR122	1,14	26,5%	5	4-5	4	8	7-8	7	5
SU V23	Int Ext	PV23	1,14	28%	4-5	4	4	8	7-8	7	5
SU B15	Int Ext	PB15:3	1,23	42%	5	4-5	4-5	8	8	8	5
SU B28	Ext	PB28	1,74	60%	5	5	5	8	8	8	5
SU G07	Int Ext	PG7	1,31	40%	5	4-5	4-5	8	8	8	5
SU W06	Int Ext	PW6	1,83	62%	5	5	5	8	8	8	5

